

TECHNICAL DATA SHEET




Hoist Torque
AUSTRALIA
'Taking you to new heights'


Rack and pinion twin mast goods hoist

PEGAdeck 5000

TECHNICAL DATA		
Payload capacity	kg	5000
Erection load	kg	3000
Speed	m/min	30
Rated lifting height	m	200
Maximum tie spacing	m	12
CAGE DIMENSIONS		
Internal width	m	5,5
Internal length	m	4,5
Door opening	m	5,5
ELECTRICAL DATA per cage		
Power supply range	415V 50Hz 3Ph	
Power supply fuse	160A	
Rated power	75kW	
Starting current	70A	
Power consumption	80kVA	
WEIGHTS		
Base unit and enclosure	kg	Varies
Cage weight	kg	Varies
Mast section 6+ with 2 rack	kg	175
Mast section length	m	1,508
CONTROL SYSTEM		
Programmable automatic floor stop		
GENERAL		
All hoists equipped with frequency controlled drives and programmable control system		
Can be used as crane loading platform		
Deck sizes can be made to suit application		

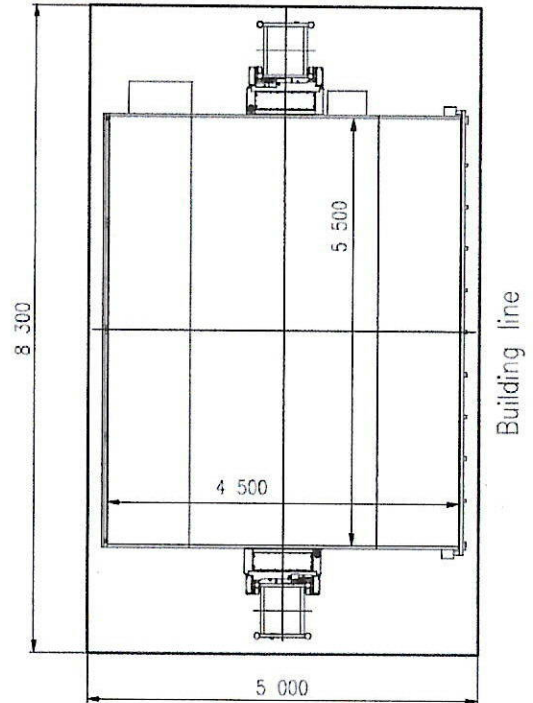

Norms and regulations: AS1418.7:1999, AS2550.7:1996
Electrical system: AS3000:2007

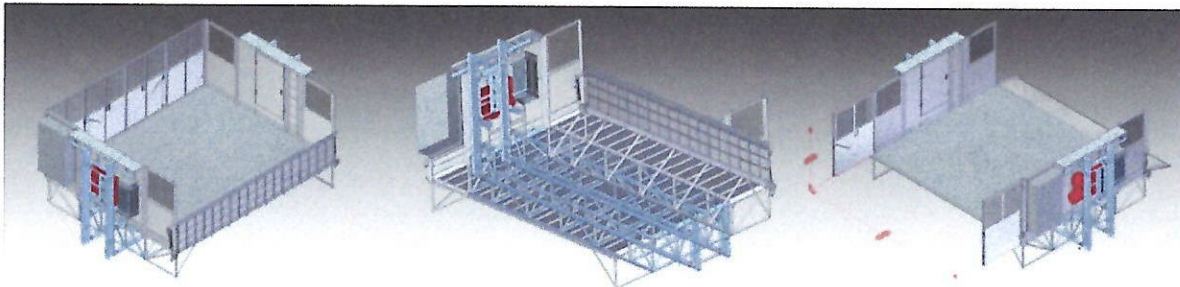

THE BIGGEST AND THE BEST